



# SN-TPC2553DT-F

Dual-spectral Network Bullet Camera



## Key Features


- Uncooled VOx Micro bolometer with 256×192 resolution
- Thermal: 7mm/10mm fixed lens optional, Visible: 8 mm fixed lens
- Support temperature monitoring and exception alarm
- Support 3 temperature measurement rule types (spot, line, area)
- Support human, vehicle and fire point detection
- Smart events: intrusion, single line crossing, double line crossing, loitering, wrong-way, people counting, enter area, leave area
- Image processing technology: DVE, 3D DNR, WDR
- IR distance up to 55m
- Support sound-light alarm

# Specification

Thermal Camera		
Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays	
Resolution	256x192, Image can be scaled up to 704x576	
Pixel Pitch	12um	
Spectral Range	8~14um	
Thermal Sensitivity (NETD)	< 50mK	
Lens Type	Fixed, F1.0	
Focus Control	Free focus	
Focal Length	7 mm	10 mm
Angle of View	H: 24°, V: 18°	H: 17°, V: 13°
Detection Distance (Humans: 1.8x0.5m)	291m	416m
Detection Distance (Vehicles: 4x1.5m)	894m	1278m
Recognition Distance (Human: 1.8x0.5m)	73m	104m
Recognition Distance (Vehicle 4x1.5m)	224m	319m
Detection Distance (Fire: 0.1x0.1m)	29m	41m
Detection Distance (Fire: 1x1m)	292m	417m
Visible Camera		
Image Sensor	1/2.7" CMOS	
Effective Resolution	2880(H)x1620(V)	
Shutter Speed	1/5 ~ 1/20,000s	
Wide Dynamic Range	True WDR 120dB	
Min. Illumination	Color: 0.001Lux @(F1.2, AGC ON) B/W: 0.003Lux @(F1.2, AGC ON)	
S/N Ratio	More than 55dB	
Focal Length	8mm	
Angle of View	H: 40°, V: 20°	
Illuminator		
IR Distance	Up to 55m	
White Light	Strobe light	
Video and Audio		
Main Stream	Visible: 2880x1620, 2560x1440, 2304x1296, 1920x1080, 1280x720 @25/30fps Thermal: D1 (704x576) @25/30fps	
Sub Stream	Visible: D1, VGA, 640x360, CIF, QVGA @25/30fps Thermal: CIF, 256x192 @25/30fps	
Bit Rate Control	CBR/VBR	
Bit Rate	Main Stream: Visible: 100Kbps~12Mbps, Thermal: 100Kbps~6Mbps, Sub Stream: Visible: 10Kbps~6Mbps, Thermal: 10Kbps~1.5Mbps,	
Region of Interest	Off / On (8 Zone, Rectangle)	
Smart Encode	Support	
Audio Compression	G.711: 8kbps, RAW_PCM: 16kbps	
Image		
Image Setting	Brightness, Sharpness, Contrast, Saturation	
Mirror	Support	

Pseudo-color Setting	White-hot/Black-hot/Rainbow/Ironbow etc. up to 17 modes (Thermal)
DVE Image Enhance	Support (Thermal)
Noise Reduction	2D/3D DNR
Privacy Masking	Support
Motion Detection	Support
Smart Function	
Smart Function	Temperature measurement, human detection and vehicle detection
Advanced Intelligence Analysis	Smoker detection, Smoke and Flame detection, fire point detection
Intelligent Analysis	Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way, Enter area, Leave area (these 7 function support accurate detection of people/vehicles) , People counting
Sound-light Alarm	Support white light flashing and horn warning
Temperature Measurement	3 temperature measurement rule types, 20 rules in total, 1 full screen, 19 others (spot, areas, line).
Temperature Alarm	Over temperature alarm, Temperature difference alarm
Accuracy	±2°C / ±2%
Response Time	≤ 30ms
Temperature Range	-20°C ~ 150°C (-4°F ~ 302°F)
Network	
Protocols	IPv4/IPv6 ,HTTP,RTSP/RTP/RTCP, TCP/UDP, DHCP, DNS, PPPOE, SMTP ,802.1x
Interoperability	ONVIF
Max. User Access	10 Users
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian
Interface	
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio Interface	1ch input, 1ch output
Built-in Speaker	Support
Alarm Interface	2ch input, 2ch output
RS485	Support
Reset Button	Support
SD Card Slot	Support, up to 256GB
General	
Power Supply	DC12V/DC24V/POE (IEEE 802.3af)
Power Consumption	Max 12W
Working Temperature	-40°C ~ 60°C (-40°F ~ 140°F)
Storage Conditions	0 ~ 90% RH
Certifications	CE /FCC
Ingress Protection	IP66
Casing	Metal
Dimensions	303x95x107 mm (11.93 x 3.74x 4.21 inch)
Net Weight	1.35 Kg (2.98 lb)

## Dimensions (mm)

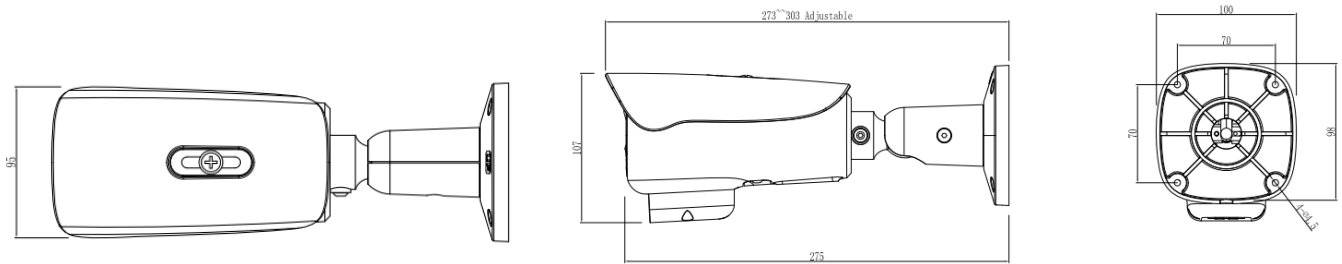

## Accessories

### Optional:



SN-CBK649B  
Junction Box



SN-CBK627D  
Pole Mount



SN-CBK645G  
Junction Box



SN-CBK101A  
Pole Mount



SN-CBK102A  
Corner Mount